

ASX Release
20 December 2017

MACKAY SOP PROJECT UPDATE

Highlights

- **Fieldwork continues as planned and is providing important information into the PFS**
- **First four months of pump testing data has been delivered to hydrogeological consultants for incorporation into the PFS**
- **Pilot evaporation pond construction commenced**

Agrimin Limited (ASX: AMN) (“Agrimin” or “the Company”) is pleased to provide an update of field activities underway at the Mackay Sulphate of Potash (“SOP”) Project in Western Australia.

Long-Term Trench Pump Testing

Excavation of 14 trenches planned as part of a pilot trenching program is complete (**Table 2**). Trench sites are widely distributed across the lake and are designed to be representative of the hydrogeological conditions expected to be encountered across the entire Project area (**Figure 1**).

A trench pump testing program commenced in August 2017, allowing the Company to generate data that will improve confidence in key assumptions underpinning the hydrogeological model and brine recovery rates for the Pre-Feasibility Study (“PFS”).

Long-term pumping tests have been completed at sites T1, T3, T6 and T9, with test durations ranging from 25 to 125 days (**Table 1**). Approximately 20 million litres of brine has been pumped from these first four trenches.

Final pumping rates at the conclusion of each test were between 0.3 to 1.4m³ (averaging 0.8m³) per day per metre of trench (“m³/day/m”) and are believed to be indicative of steady-state conditions for these trenches. The 2016 Scoping Study hydrogeological model assumed an average rate of 0.75m³/day/m, which supported a targeted production rate of 370,000 tonnes of SOP per year over a 20 year life¹.

Assay results of brine samples taken from trenches over the duration of the pumping tests are demonstrating stable concentrations (**Table 3**). The Mackay SOP Project Mineral Resources are contained within a single deposit and brine chemistry is considered homogeneous across the deposit.

¹ Refer to the ASX Release dated 23 August 2016 for full Scoping Study details. All material assumptions underpinning the production target and forecast financial information derived from the production target continue to apply and have not materially changed.

The Company has now provided data from the four completed long-term pumping tests to its consultants at Knight Piesold (“KP”). This data is being used to calibrate the hydrogeological model and to improve the understanding of the hydraulic properties of shallow lake sediments to support the PFS.

Figure 1. Map of Planned On-Lake Trench Locations and Off-Lake Bore Locations

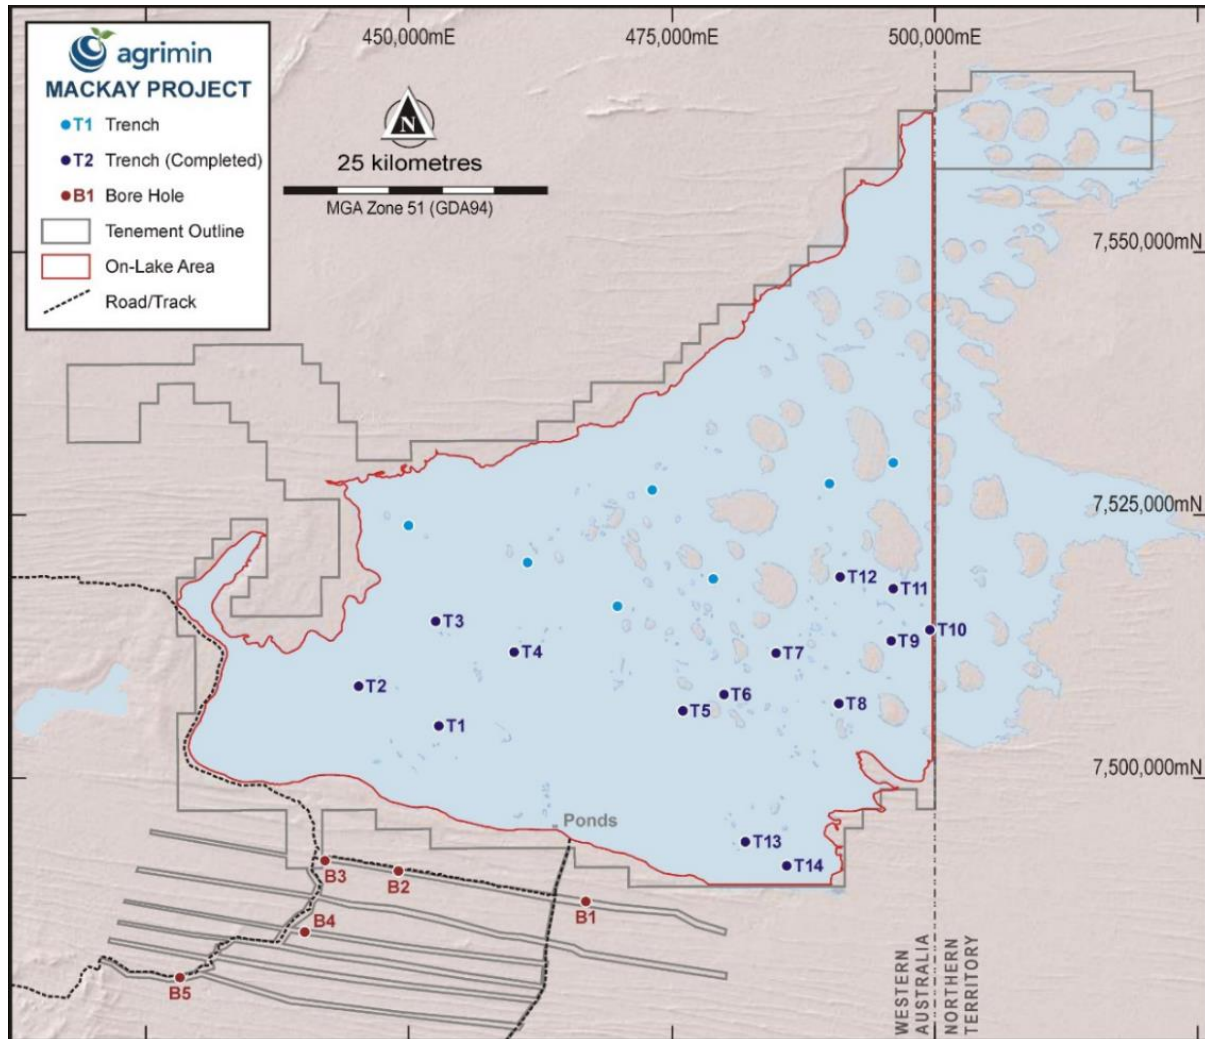


Table 1. Results of Long-Term Pumping Tests

Trench ID ¹	Status of Pumping Test	Start of Pumping Test	Drawdown in Trench ³	Duration of Testing Period	Total Volume Pumped ²	Indicative Steady-State Pumping Rate
T1	Long-term test completed	4/8/2017	0.6m	60 days	7,904m ³	1.4m ³ /day/m
T3	Long-term test completed	10/8/2017	2.0m	125 days	4,166m ³	0.5m ³ /day/m
T6	Long-term test in progress	13/10/2017	1.2m	25 days	890m ³	0.3m ³ /day/m
T9	Long-term test in progress	12/10/2017	0.6m	62 days	6,305m ³	1.2m ³ /day/m

Notes:

1. Trench locations and dimensions are reported in Table 2.
2. Mechanical issues with the pumps from time to time have caused pumping to stop for periods during testing which has resulted in the volume pumped being lower than what is achievable. The indicative steady-state pumping rate has taken this into account.
3. All trenches intersected brine from the water table to the base of the trench.

The Company plans to continue pilot trenching and long-term pump testing at other locations throughout 2018. Collection of additional representative data at different sites across the lake will provide increased confidence in predicted brine recovery rates for a Definitive Feasibility Study (“DFS”).

Other Fieldwork


The Company commenced the construction of pilot evaporation ponds in December 2017. The ponds are being constructed on the lake surface using a cut-to-fill construction method, which is the same method proposed for full-scale construction and as advised by KP.

The evaporation pond design for the Mackay SOP Project has been developed by Global Potash Solutions (“GPS”) based on extensive process testwork recently completed at the Saskatchewan Research Council (“SRC”). The size, number of cells and configuration of the pilot ponds is representative of the full-scale PFS design (Figure 2). KP has developed the geotechnical design and construction details for the pilot ponds.

The pilot evaporation ponds are primarily designed to test the following key parameters:

- Confirm the evaporation and crystallisation pathway of the lake brines under site conditions with daily and seasonal variation;
- Provide further supporting evaporation data for pond sizing and configuration purposes;
- Confirm applicable geotechnical parameters to feed into scaled-up pond designs; and
- Address other specific technical parameters including pond operating depth, brine entrainment, pond start-up and timing, and other operating requirements.

Figure 2. Pilot Evaporation Ponds Under Construction with 3D Schematic Design Inset

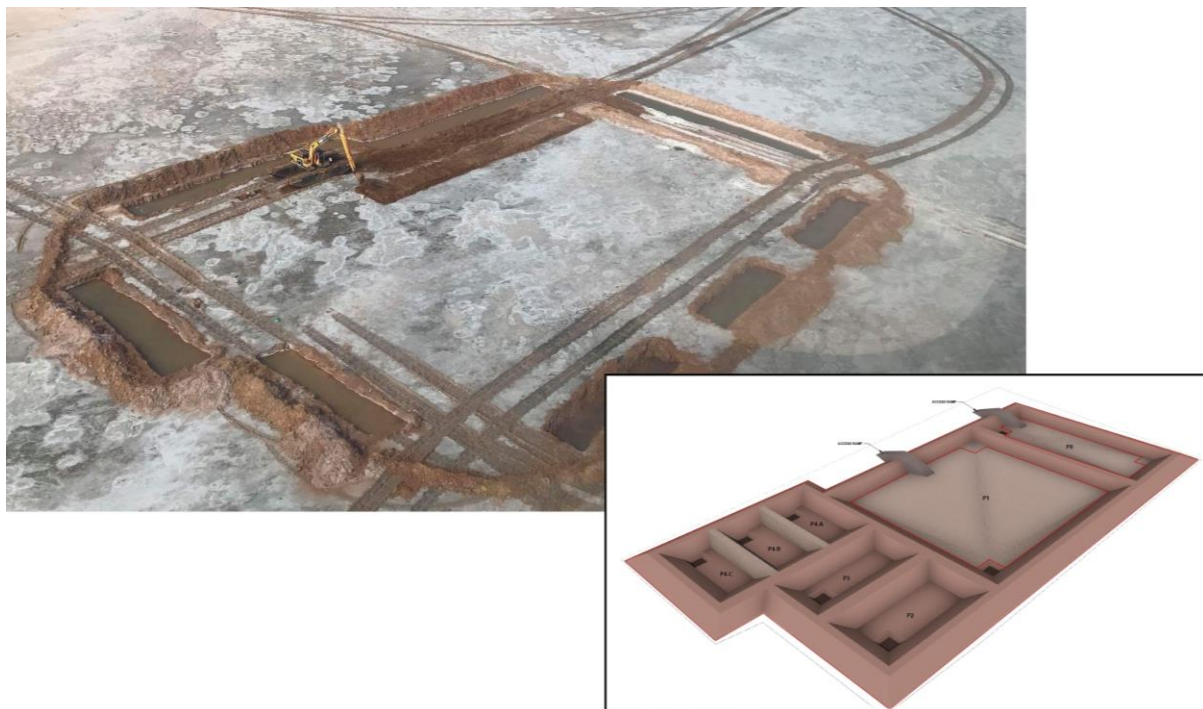

The Company has also recently completed a major track construction and maintenance program (**Figure 3**). This has improved existing site access in anticipation of increased fieldwork activities during 2018. A new track provides access to the edge of Lake Mackay where pilot evapotranspiration ponds are currently being constructed.

Figure 3. New Access Track to Pilot Evaporation Ponds



Environmental Studies

During November 2017, the Company completed further environmental surveys with assistance from the Kivirrkurra IPA rangers. Various studies are being finalised and Agrimin continues to consult with key authorities and stakeholders. To date, the Company has carried out a range of studies to assist an environmental assessment of the Project, including but not limited to:

- Envirodata Weather Station Installed (August 2015);
- Level 1 Vertebrate Fauna and Single Phase Level 2 Flora and Vegetation Assessment (September 2016);
- Subterranean Fauna Risk Assessment (September 2016);
- Aquatic Macroinvertebrate Survey (April 2017);
- Detailed Flora and Vegetation Assessment (April 2017);
- Waterbird Survey (April 2017);
- Pilot Survey for Subterranean Fauna (May 2017);
- Single Phase Level 2 Short Range Endemic Fauna Survey (May 2017);
- Single Phase Level 2 Vertebrate Fauna Survey (May 2017);
- Acid Sulphate Soil Analysis (August 2017);
- Risk Assessment of Potential Project Impacts to Vertebrate Fauna and Flora of Conservation Significance (October 2017);
- Second Phase Level 2 Vertebrate Fauna Survey (November 2017);
- Second Phase Level 2 Short Range Endemic Fauna Survey (November 2017);

- Targeted Threatened Flora Survey (November 2017);
- Targeted Threatened Vertebrate Fauna Survey (November 2017);
- Single Phase Level 2 Stygofauna Survey (November 2017); and
- Single Phase Level 1 Troglifauna Survey (November 2017).

Pre-Feasibility Study Update

Agrimin continues to progress the PFS which is assessing a number of production and transport scenarios. The PFS program is being extended to allow assessment of options which have the potential to materially increase production rates and lower the Project's cash costs.

The extended PFS program is planned for completion in Q2-2018 and the Company intends to provide interim updates as key milestones are attained. Based on the Company's project delivery timeline, the extension to the PFS will not impact the overall timeline to first production. Extension of the PFS is expected to allow a more efficient and focused approach for the DFS and the environmental assessment process.

New Tenement Applications

Agrimin recently lodged applications for two Exploration Licences (EL31780 and EL31781) covering Lake Mackay in the Northern Territory. The Company intends to provide further updates on the status of this tenure shortly.

The Company remains focused on the proposed development of a 370,000 tonne per year SOP operation contained solely within the 2,384km² area which has been cleared under a Native Title Agreement.

ENDS

Contacts

Investor Relations:

Mark Savich
Chief Executive Officer
T: +61 402 746 757
E: msavich@agrimin.com.au

Media:

Michael Vaughan
Fivemark Partners
T: +61 422 602 720
E: michael.vaughan@fivemark.com.au

Or visit our website at www.agrimin.com.au

About Agrimin

Based in Perth, Agrimin Limited is a leading fertilizer development company focused on the development of its 100% owned Mackay SOP Project. The Project is situated on Lake Mackay in Western Australia, the largest undeveloped SOP-bearing salt lake in the world. Agrimin is aiming to be a global supplier of high quality SOP fertilizer to both traditional and emerging value-added markets. Agrimin Limited's shares are traded on the Australian Stock Exchange (ASX: AMN).

Forward-Looking Statements

This ASX Release may contain certain “forward-looking statements” which may be based on forward-looking information that are subject to a number of known and unknown risks, uncertainties, and other factors that may cause actual results to differ materially from those presented here. Where the Company expresses or implies an expectation or belief as to future events or results, such expectation or belief is expressed in good faith and believed to have a reasonable basis. Forward-looking information includes exchange rates; the proposed production plan; projected brine concentrations and recovery rates; uncertainties and risks regarding the estimated capital and operating costs; uncertainties and risks regarding the development timeline, including the need to obtain the necessary approvals. For a more detailed discussion of such risks and other factors, see the Company’s Annual Reports, as well as the Company’s other ASX Releases. Readers should not place undue reliance on forward-looking information. The Company does not undertake any obligation to release publicly any revisions to any forward-looking statement to reflect events or circumstances after the date of this ASX Release, or to reflect the occurrence of unanticipated events, except as may be required under applicable securities laws.

Competent Person’s Statements

The information in this statement that relates to Exploration Results for the Mackay SOP Project is based on information compiled or reviewed by Mr Laurie Mann, who is a fellow of AusIMM. Mr Mann is a full-time consultant to Agrimin Limited and was the Registered Manager for Shark Bay Salt Joint Venture, a solar salt operation in Western Australia. Mr Mann has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration, and to the activity he is undertaking, to qualify as a Competent Person in terms of the ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves’ (JORC Code 2012 Edition). Mr Mann consents to the inclusion of such information in this statement in the form and context in which it appears.

Table 2. Location and Dimensions of Pilot Trenches ¹

Trench ID	Easting	Northing	Excavated Depth	Trench Length
T1	452880	7504972	4.0m	100m
T2	445231	7508720	5.0m	100m
T3	452574	7514916	4.0m	100m
T4	460008	7512003	4.5m	100m
T5	474098	7504090	5.0m	100m
T6	479984	7507964	5.5m	100m
T7	484981	7511898	6.0m	30m
T8	490922	7507101	4.5m	100m
T9	495997	7513449	6.0m	100m
T10	499725	7513971	6.0m	100m
T11	495998	7518001	6.0m	100m
T12	491031	7519093	6.0m	100m
T13	482030	7494097	6.0m	100m
T14	485923	7491845	6.0m	100m

Notes:

1. Locations are in GDA94 Zone 52.

Table 3. Brine Chemistry of Pilot Trenches During Pumping Tests

Trench ID	Sample Date	K (mg/L)	Mg (mg/L)	SO ₄ (mg/L)
T1	4/8/2017	3,342	2,892	22,046
	16/8/2017	3,763	2,578	22,268
	2/9/2017	3,793	2,618	22,906
	5/9/17	3,631	2,848	14,399
	30/9/17	3,624	2,883	17,742
T3	10/8/2017	3,410	3,874	22,109
	16/8/2017	3,809	3,358	21,624
	2/9/2017	3,815	3,408	22,004
	30/9/17	3,646	3,688	21,967
	7/10/17	3,635	3,678	20,688
	31/10/17	3,634	3,456	23,575
	6/11/17	3,782	3,609	23,146
	23/11/17	3,626	3,468	22,878
T6	31/10/17	3,922	3,570	23,441
	6/11/17	3,805	3,469	23,772
T9	31/10/17	2,970	1,932	18,237
	6/11/17	3,103	2,008	18,750
	23/11/17	2,907	1,884	18,564
Mineral Resources: ¹		3,603	3,036	23,051

Notes:

1. Information that relates to Mineral Resources has been extracted from the Company's ASX Release on 15 December 2015.

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Sediment samples are collected from the excavator bucket at regular intervals to assess the lithology of the trenches at different depths. Brine samples are collected into clean sample bottles from discharge hosing on the pump units at weekly intervals, representing a composite brine sample from the trench.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Excavation of the trenches is completed by a 25t amphibious excavator with an arm to excavate up to 12m deep.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Not applicable to trenching.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All trenches were logged for hydrogeological characteristics, including descriptions of lithology, sediment grain size, colour, general observations and flow rates. A qualified hydrogeologist/geologist logged all samples.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, 	<ul style="list-style-type: none"> Not applicable for trenching. Representative brine samples are taken from the trenches by pumping, with a surface mounted pump.

	<p>including for instance results for field duplicate/second-half sampling.</p> <ul style="list-style-type: none"> • Whether sample sizes are appropriate to the grain size of the material being sampled. 	
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> • The samples collected were analysed for elemental assay at Intertek laboratories in Perth, a reputable independent laboratory. Internal laboratory standards are in place to calibrate equipment and maintain analytical procedures. • The technique of analysis used is Inductively Coupled Plasma Optical (Atomic) Emission Spectrometry for cations and sulphur, UV visible spectrometry for chloride, gravimetric analysis for Total Dissolved Solids (TDS). Sulphate concentration was calculated from the sulphur analysis. • Quality control procedures were in place throughout the analyses process, including the use of blanks, duplicates and laboratory certified standards.
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • Qualified hydrogeologists carried out the sampling of brine from pumped trenches.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • Trenches were located using a handheld GPS system, with accuracy of +/- 5m. • The grid system used was GDA94 in MGA Zone 52. • The salt lake surface is generally flat lying so high precision topographic control is not an important consideration for trenching.
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • Trenches are broadly spaced at differing distances apart, generally 10-15km to elevate different geomorphological areas of the salt lake. • All brine samples are considered a composite from the top of water table to the depth of the trench.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • Trench locations are considered representative of the broad lakebed sediment deposit. • The lake sediments are a horizontally lying sequence and the sampling is perpendicular to this. Any structures of importance in the sediments are considered to be sub-horizontal. • Some anisotropy in hydraulic parameters of the sediments is noted from the installation of monitoring wells on different sides of the trenches.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • All samples were clearly labelled and kept onsite prior to being transported to Perth, via secured freight, for analysis. • Samples for assaying were submitted to an independent laboratory, with a chain of custody system maintained.
Audits or reviews	<ul style="list-style-type: none"> • The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> • No audits or reviews were conducted.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Project is 100% owned by Agrimin Limited. The project tenure is held under granted Exploration Licences and Miscellaneous Licences - E80/4887, E80/4888, E80/4889, E80/4890, E80/4893, E80/4995, E80/5055, L80/87 and L80/88. The Project area is subject to native title determination held by the Kiwirrkurra People.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Other companies including Holocene Pty Ltd, Verdant Resources Ltd and Toro Energy Ltd have completed exploration in the area previously. The previous exploration has provided important information on the geology and water quality in the broader Lake Mackay area.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The deposit type is brine-hosted potash in a salt lake/playa, with brine hosted in the pores of the sequence of flat lying sediments.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Refer to trench location table in the ASX Release. Approximate RL of the lake is 355m.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Brine samples from the trenches are the composite samples from inflow in the 100m long trenches.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> The brine aquifer is considered to be continuous throughout the sediment profile of the lake, which has been confirmed by analyses of depth profiles in drilling conducted across the lake on a 5 km grid. The lake sediment units are flat lying and all holes have been drilled vertically so it is assumed that the true width of mineralisation has been intersected in each hole/trench.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Refer to figures within the ASX Release.

<p>Balanced reporting</p>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • Results considered relevant have been reported. Assay results will be provided in subsequent follow up ASX releases as they become available.
<p>Other substantive exploration data</p>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • No other exploration has been carried out within the Project area. • Toro Energy Ltd (ASX: TOE) and Verdant Resources Ltd (ASX: VRM) have conducted potash and uranium exploration on neighboring tenure at Lake Mackay. • Agrimin has previously reported the results of aircore and auger core drilling at Lake Mackay and the results of brine sampling from these programs.
<p>Further work</p>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Work associated with the Pre-Feasibility Study for the Project is underway. Refer to ASX Release.